


Hazard Maps Help Save Lives and Property

National maps of earthquake shaking hazards provide information essential to creating and updating the seismic design provisions of building codes used in the United States. Scientists frequently revise these maps to reflect new knowledge. Buildings, bridges, highways, and utilities built to meet modern seismic design provisions are better able to withstand earthquakes, not only saving lives but also enabling critical activities to continue with less disruption.

America's first line of defense against earthquakes has historically been the construction of buildings that can withstand severe shaking. Cities and counties rely on the seismic design provisions in building codes to ensure that structures can resist earthquakes. The variations in the seismic threat across the country are depicted on special maps in building codes, called design maps, as zones or contours of different recommended levels of design for earthquake-resistant construction. These design maps are based on shaking-hazard maps prepared by U.S. Geological Survey (USGS) scientists and engineers as part of the National Earthquake Hazard Reduction Program (NEHRP).

National maps of the earthquake shaking hazard in the United States have been produced since 1948. Scientists revise these maps as new earthquake studies improve

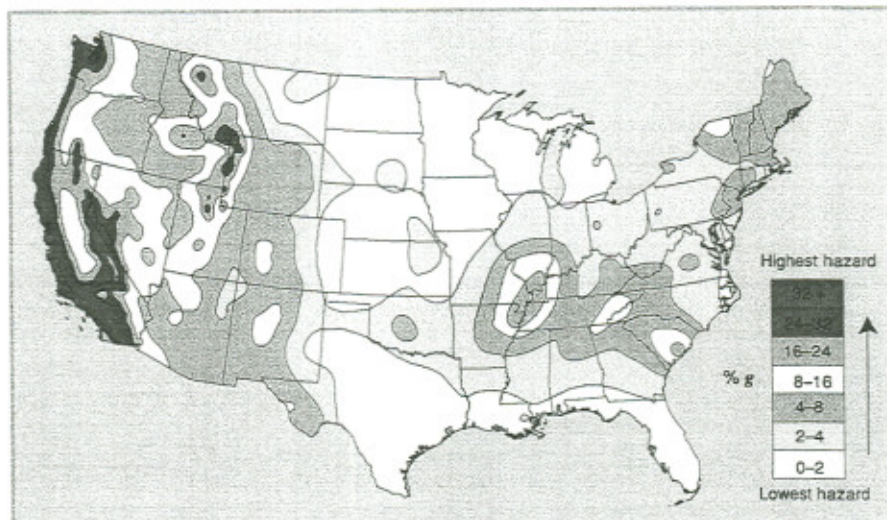

The 1996 U.S. Geological Survey shaking-hazard maps for the United States are based on current information about the rate at which earthquakes occur in different areas and on how far strong shaking extends from quake sources. Colors on this particular map show the levels of horizontal shaking that have a 1-in-10 chance of being exceeded in a 50-year period. Shaking is expressed as a percentage of g (g is the acceleration of a falling object due to gravity).

their understanding of this hazard. After thorough review, professional organizations of engineers in turn update the seismic design maps and seismic design provisions contained in building codes. More than 20,000 cities, counties, and local government agencies use building codes, such as the Uniform Building Code, to help establish the construction requirements necessary to preserve public health and safety in earthquakes.

Shaking-hazard maps have many other applications. For example, the 1976 U.S. Geological Survey (USGS) shaking-hazard map for the United States was used for many years as the basis of design require-


ments for highway bridges nationwide. Such maps are also used by:

- Insurance companies to set insurance rates for properties in various areas of the country,
- Civil engineers to estimate the stability and landslide potential of hillsides,
- The Environmental Protection Agency to set construction standards that help ensure the safety of waste-disposal facilities, and
- The Federal Emergency Management Agency (FEMA) to plan the allocation of assistance funds for earthquake education and preparedness.

A new series of national shaking-hazard maps was prepared by the USGS in 1996. Each of these maps shows the severity of expected earthquake shaking for a particular level of probability. For example, the map at the top of this page shows levels of earthquake shaking that have a 1-in-10 chance of being exceeded in a 50-year period. This new series of maps also depicts shaking using a number of different measures that engineers can readily apply to designing earthquake-resistant buildings of different heights.



The upper wall of this unreinforced masonry building in Fillmore, California, collapsed and destroyed a parked vehicle during the 1994 Northridge earthquake. Unreinforced masonry buildings are especially susceptible to collapse or severe damage during strong earthquake shaking. Shaking-hazard maps can be used to determine if such buildings in a particular area need to be reinforced to make them safe in earthquakes.

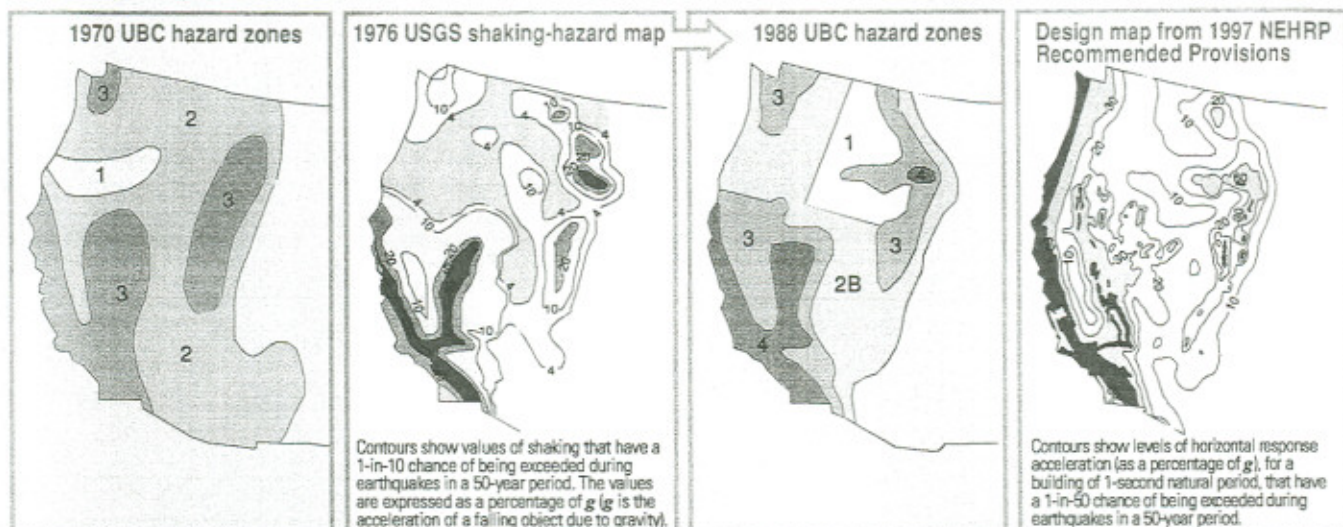

Shaking-hazard maps prepared by U.S. Geological Survey (USGS) scientists are used by professional organizations of engineers to improve the seismic-zone maps published in building codes, such as the Uniform Build-

ing Code (UBC). The 1976 USGS shaking-hazard map represented a substantially improved understanding of the earthquake hazard nationwide and was used to produce the updated 1988 UBC seismic-zone map, which added

zone 4 to represent a newly recognized higher level of hazard. Contours from 1996 USGS hazard maps are used in the 1997 map from the "NEHRP Recommended Provisions" published by the Building Seismic Safety Council (BSSC).

Shaking-hazard maps can be combined with data about the strength of existing buildings to estimate expected earthquake damage in an area over a given period of time. Although strong earthquakes are less frequent in the Central and Eastern United States than in California, damage in those regions could be catastrophic in a powerful

temblor. This is because most buildings and other structures there have not been constructed to withstand severe earthquake shaking. For example, the shaking hazard in Boston is far lower than that in Los Angeles, but a strong earthquake striking the Boston area today could produce much greater damage to structures than one striking Los Angeles. A single earthquake in the Central or Eastern United States could cause as many casualties and as much damage as several earthquakes of similar magnitude in California.

To familiarize design engineers, local public officials, emergency-services personnel, and other users with shaking-hazard maps and earthquake risk issues, the USGS conducts workshops throughout the country. These seminars have, for example, been held in New York, Memphis, Salt Lake City, San Francisco, and Seattle, and will continue in these and other places in the future. As new maps are prepared, the latest shaking-hazard maps will also be available for examination and comment on the Internet at <http://geohazards.cr.usgs.gov/eq/index.html>.

Recently, the USGS worked with the FEMA-funded Building Seismic Safety Council (BSSC) to produce new seismic design maps for the United States, based on the 1996 USGS shaking-hazard maps. The new design maps were published by the BSSC in its 1997 and 2000 "NEHRP Recommended Provisions for Seismic Regulations for New Buildings and Other Structures." These maps have been included in the seismic provisions of U.S. model building codes, such as the new "International Building Code," and in national standards

such as "Minimum Design Loads for Buildings and Other Structures," prepared by the American Society of Structural Engineers.

Through the continuing process of refining estimates of the earthquake-shaking hazard across the Nation and observing successes and failures in building design, scientists and engineers are laying the groundwork for future urban environments that will be safer in earthquakes. By improving the resistance of homes, office buildings, hospitals, highways, dams, and utilities to earthquake shaking, scientists and engineers also help to ensure that communities are able to recover rapidly following a major temblor.

William M. Brown III, David M. Perkins,
Edgar V. Leyendecker, Arthur D. Frankel,
James W. Hendley II, and Peter H. Stauffer

Graphic design by
Sara Boore and Susan Mayfield

COOPERATING AGENCIES

American Assoc. of State Hwy. Transportation Officials
American National Standards Institute
American Society of Civil Engineers
Applied Technology Council
Building Officials and Code Administrators International
Building Seismic Safety Council
California Division of Mines and Geology
Environmental Protection Agency
Federal Emergency Management Agency
International Conference of Building Officials
National Center for Earthquake Engineering Research
National Oceanic and Atmospheric Administration
Southern Building Code Congress
Southern California Earthquake Center
Structural Engineers Association of California

For more information contact:
Earthquake Information Hotline (650) 329-4085
U.S. Geological Survey, Mail Stop 977
345 Middlefield Road, Menlo Park, CA 94025
<http://quake.wr.usgs.gov>



This home in Santa Cruz, California, damaged in the 1989 Loma Prieta earthquake, shows the effects of a weak "cripple-wall" connection between the upper part of the house and its foundation. Houses without adequate connections to foundations can easily shift during even moderate earthquake shaking, causing extensive damage. For example, pipes and wires may be broken by a slight cripple-wall shift, resulting in fires, water damage, or other problems. Much damage of this type can be avoided by using inexpensive bracing techniques, such as those recommended in the seismic design provisions of building codes.



Earthquake Hazards Program

[Latest Quakes](#)
[EQ Facts & Lists](#)
[Hazards & Preparedness](#)
[For Kids Only](#)
[Regional Websites](#)
[Science & Technology](#)
[HOME](#)
[ABOUT US](#)
[EQ GLOSSARY](#)
[FOR TEACHERS](#)
[PRODUCTS & SERVICES](#)
[DID YOU FEEL IT?](#)
[FAQ](#) | [SEARCH](#)

National Seismic Hazard Mapping Project

Contents:

[WEB SITE CONTENTS](#)
[Go!](#)

Related Sites:

[RELATED SITES](#)
[Go!](#)
[Hazard Mapping Home Page](#)

2002 USGS National Seismic Hazard Maps

Expansion of April 2003 Revision

[Frequently Asked Questions \(FAQ\)](#)


To view and print the postscript (ps) files from your browser, download, (free), the [GSview](#) utility. To view and print the PDF files from your browser, download, (free), the [Adobe Acrobat Reader](#).

Featured Pages

Western US maps; Revised April 2003

Peak Acceleration (%g) with 10% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

[Interactive Maps, 1996](#)

Peak Acceleration (%g) with 2% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

[Gridded Data Values, modified Oct 29, 2003](#)

0.2 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

[Quaternary Fault and Fold Database, 2003](#)

0.2 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

California, Nevada, Utah maps; Revised April 2003

Peak Acceleration (%g) with 10% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

Peak Acceleration (%g) with 2% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

0.2 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

0.2 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

Pacific Northwest maps

Peak Acceleration (%g) with 10% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

Peak Acceleration (%g) with 2% Probability of Exceedance in 50 Years: [ps](#), [pdf](#), [gif](#)

0.2 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

0.2 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 10% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

1.0 sec Spectral Acceleration (%g) with 2% Probability of Exceedance in 50 years: [ps](#), [pdf](#), [gif](#)

Although these maps have been used by the U.S. Geological Survey, no warranty, expressed or implied is made by the USGS as to the accuracy of the maps and related material nor shall the fact of distribution constitute any such warranty, and no responsibility is assumed by the USGS in connection therewith.

PROJECT INFO: Home Page Frequently Asked Questions Info for the Layman Current Earthquake Info What's New Home Page Graphics Personnel Mailing List
HAZARD MAPS: Published Maps, 1996 Conterminous US, 1996 Conterminous US, 2002 California/Nevada, 1996 Western US, 2002 Central/Eastern US, 1996 Central/Eastern US, 2002 Hawaii, 2000 Alaska, 1999 Puerto Rico & U.S. Virgin Islands, 2003 Custom Mapping, 1996 Additional Maps, 1996 GIS data, 1996 Map Orders, 1996 Interactive Maps, 1996
SEISMIC HAZARD: Conterminous US, Gridded Values, 1996 Conterminous US, Gridded Values, 2003 Hazard by Zip Code, 1996 Hazard Curve files, 2002 Hazard by Lat/Lon, 1996 Hazard by Lat/Lon, 2002 Deaggregations, 1996 Interactive Deaggregation, 1996 Interactive Deaggregation, 2002 Uncertainties, 1996
MAP INFO: Documentation, 1996 Documentation, 2002 Catalogs, 1996 Seismicity Rates, 1996 Seismicity Rates, 2002 Fault Parameters, 1996 Fault Parameters, 2002 Quaternary Fault and Fold Database, 2003 Hazard Software, 1996
DESIGN MAPS: NEHRP Maps, 1997, 2000 IBC Maps, 2000, 2003 IRC Maps, 2000, 2003 Design Values, 1997
GENERAL: Anonymous FTP, 1996 Anonymous FTP, 2002 Publications Publication Orders Software, PRE-1996 Damage Photos Related Links
RELATED SITES: National Earthquake Information Center Geologic Hazards Ground Motion Multi-Hazard Mapping Initiative

U.S. Geological Survey, a bureau of the U.S. Department of the Interior

URL: <http://eqhazmaps.usgs.gov/html/wus2002.html>

E-mail: [Web Contacts](#)


Last Modified: Wednesday, January 19, 2005 16:41

Maintained by: Web Team

[USGS Privacy Statement](#) | [Disclaimer](#) | [FOIA](#) | [Accessibility](#)



Peak Acceleration (%g) with 2% Probability of Exceedance in 50 Years
USGS Map, Oct. 2002rev

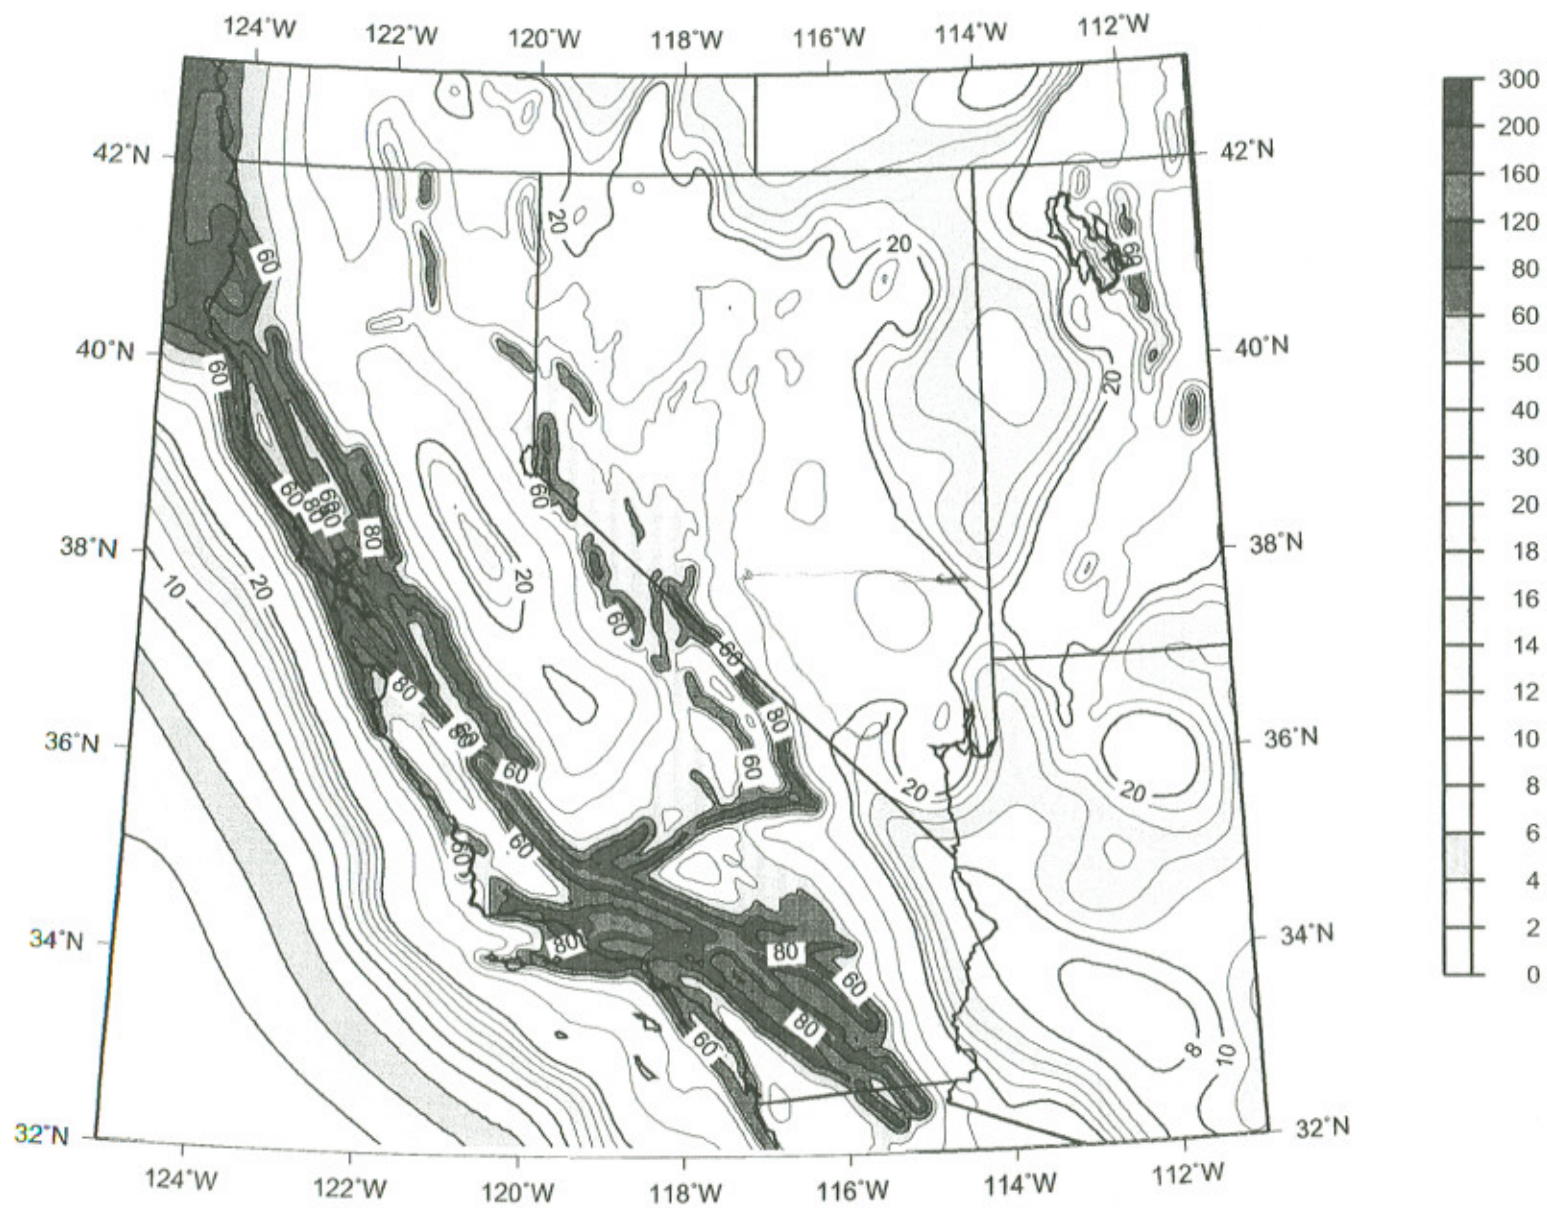

Peak Acceleration (%g) with 10% Probability of Exceedance in 50 Years
USGS Map, Oct. 2002rev

